

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
19 May 2005 (19.05.2005)

PCT

(10) International Publication Number  
**WO 2005/043986 A1**

(51) International Patent Classification<sup>7</sup>: **A01J 7/04, 7/02**

(71) Applicant and

(21) International Application Number:

PCT/GB2004/004343

(72) Inventor: **DUKE, James, Richard, John** [GB/GB]; Ham Road, Sidlesham, Chichester, West Sussex PO20 7NG (GB).

(22) International Filing Date: 13 October 2004 (13.10.2004)

(74) Agents: **WARREN, Keith, Stanley** et al.; Baron & Warren, 19 South End, Kensington, London W8 5BU (GB).

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:


0324647.7	22 October 2003 (22.10.2003)	GB
0402119.2	30 January 2004 (30.01.2004)	GB
0408968.6	22 April 2004 (22.04.2004)	GB
60/566,313	29 April 2004 (29.04.2004)	US
60/566,314	29 April 2004 (29.04.2004)	US
0417392.8	4 August 2004 (04.08.2004)	GB

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

[Continued on next page]

(54) Title: MILKING EQUIPMENT AND METHOD

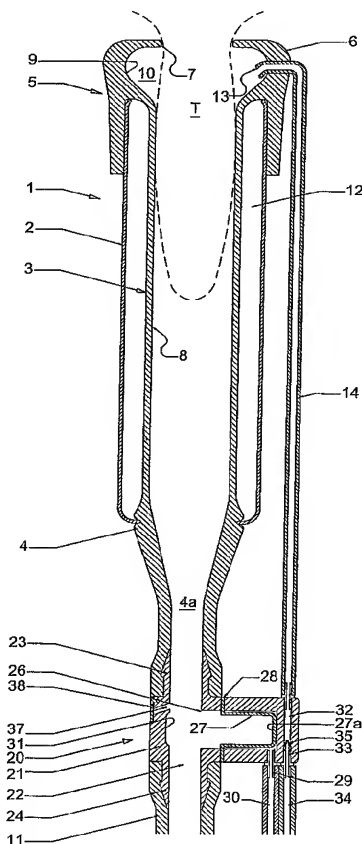

(57) Abstract: In apparatus and methods for applying treatment and cleaning fluid to cows teats and the teat cups of milking equipment, post-milking, each teat cup (1) has a nozzle (13) in the head portion (6) of the flexible liner (3) of the teat cup for delivering fluid internally of the teat cup. The nozzle is directed so as to discharge fluid towards the discharge end (4) of the teat cup. When milking is terminated, treatment fluid is injected through the nozzle (13) into the head portion of the liner (3) just prior to and/or as the teat cup is being withdrawn from the teat and, as a result, the teat cup wipes the injected fluid down the teat so as substantially to coat the teat with the treatment fluid. When the teat cup (1) falls into an inverted rest position, after take-off, the interior of the liner (3) may be flushed and dried with disinfectant, water and compressed air discharged upwardly into the liner by the nozzle (13). Flushing fluid can then drain downwardly from the liner and through its mouth (7). The discharge end (4) of the teat cup may be fitted with a shut-off valve (20) which can be actuated to prevent ingress of treatment and cleansing fluids into the milk tubes during the treatment and cleansing cycle.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *with amended claims and statement*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

## MILKING EQUIPMENT AND METHOD

The present invention relates to milking equipment and, more particularly, to devices and methods for enabling the application of treatment fluid to animals' teats and the treatment and cleansing of teat cups, post milking.

Conventionally, automatic milking equipment installed in a milking parlour comprises a milking point at each animal stall within the parlour. Each milking point includes a milking cluster of teat cups for connecting the equipment to the teats of an animal to be milked. In the case of cows, for example, each milking cluster has four teat cups. Each teat cup comprises a hollow shell supporting a flexible liner which has a barrel portion for engaging about a teat and, at its upper end, has a head portion with a mouth through which the teat is engaged with the barrel of the liner. At the opposite, discharge end of the teat cup, the liner communicates with a flexible, short milk tube connected to a, so called, clawpiece of the cluster where the milk extracted from the animals teats is collected and delivered, via a flexible, long milk tube, to the collection chamber of the equipment. Upon commencement of milking, a vacuum is applied to the teat cups, via the long milk tube, the clawpiece and the short milk tubes, for the purposes of extracting milk from the teat cups. This vacuum also leaks between the barrel of the liner and the engaged teat and is applied to a void formed about the teat in the head of the liner in order to capture the cup on the teat. Milking is achieved by automatically and alternately applying vacuum and atmospheric pressure pulses to the space between the shell and the liner of each teat cup in order to flex the liner and stimulate discharge of milk from the engaged teat. The clawpiece includes a distributor for distributing the pneumatic pulses to the individual teat cups, via flexible pneumatic lines, as well as for distributing disinfectant and other treatment fluid, water and compressed air to the individual teat cups for the purposes of treating and cleansing the teats and teat cups.

After completion of a milking cycle, the milking cluster at each milking point is withdrawn from the teats (commonly referred to as "take-off") such as by an automatic cluster remover, and the animal's teats are manually or automatically treated with disinfectant and conditioning fluid, such as, iodine

or chlorohexadine and an emollient. The manual dipping, spraying and otherwise washing of teats and teat cups with disinfectant and cleansing fluid is labour intensive and has the additional drawbacks that the washing process may not be carried out in a timely fashion and the quality of the washing may be variable dependent upon the operator. Automatic systems which are currently available for mechanically spraying disinfectant and washing fluid onto teats and into teat cups tend to give variable results. Moreover, whether manual or mechanical spraying is utilised, the resulting vapour or spray mist may pose a health risk.

10       An automatic system for disinfecting at least the lower parts of teats engaged with teat cups and also the teat cups, themselves, upon completion of a milking cycle, is described in DE-A2 622 794. In this system, each teat cup has a nozzle arranged to inject sanitising fluid into the lower part of the barrel of the teat cup liner at a position below the engaged teat. The nozzle is directed upwardly in order to discharge the sanitising fluid toward the engaged teat. It is connected to a source of sanitising fluid which is operated to inject the sanitising fluid into the teat cup, upon completion of milking and whilst the teat cup is engaged with and being removed from the teat.

20       A system for automatically cleansing teat cups subsequent to milking, is described in EP-A-0 543 463. Each teat cup has a tube for supplying cleansing fluid to the interior of the teat cup liner connected to the short milk tube at a point near the liner. This supply tube is arranged to inject a stream of cleansing fluid into the liner in a direction towards the mouth of the liner. The cleansing fluid is injected into each teat cup after withdrawal of the teat cups from a cow and when the teat cups are hanging with their mouths downwardly, in a rest position. Hence, the cleansing fluid is squirted downwardly into the milk line and via the inside wall of the liner to the mouth of the liner. The teat cup may alternately be flushed several times with cleansing fluid and compressed air for blowing clean and drying the teat cup.

30       An object of the present invention is to alleviate the drawbacks associated with current techniques employed for disinfecting and washing animal teats and teat cups, after milking. Other objects are to simplify the processes of treating and cleansing an animal's teat and a teat cup, post-

milking, and to simplify the construction of the teat cup and associated components for conducting the treatment and cleansing process

To this end, the invention consists in a teat cup comprising a flexible liner for engaging about a teat of an animal to be milked, said liner having a  
5 head portion, at one end, provided with a mouth through which the teat is engageable with the liner, and a milk discharge passageway at the opposite end, and nozzle means for discharging fluid into the liner, characterised in that said nozzle means is arranged to discharge fluid into the head portion of the liner.

10 The invention also consists in a method of milking comprising the steps of applying a teat cup to a teat of an animal to be milked, said teat cup including a flexible liner engaging about the teat and having a head portion, at one end, provided with a mouth through which the teat is engaged with the  
15 liner, and a milk discharge passageway at the opposite end, activating the cup to perform a milking operation, and discharging treatment fluid into the liner and withdrawing the teat cup from the teat when milking is terminated, characterised in that the treatment fluid is discharged into the head portion of the teat cup and on to the teat prior to and/or as the teat cup is withdrawn, such that withdrawal of the teat cup from the teat wipes the fluid down the  
20 teat.

With the invention, treatment fluid may be injected manually or automatically into the head portion of the teat cup liner. The injection of treatment fluid at this position, just prior to and/or during withdrawal of the cup from the teat enables the teat cup to wipe the injected fluid down the teat  
25 as the teat cup is withdrawn, and substantially coat the teat with the fluid. As a result, the teat is coated immediately after milking thereby giving protection before the teat is exposed to the environment. Moreover, any vapourised liquid is contained within the head of the liner thereby reducing the emission of vapour and spray mist associated with known manual and automatic spray  
30 devices with consequent reduction of the health risk. The process of discharging treatment fluid into the head of the liner can be fully automated saving labour costs and affording the operator more time to spend on pre-milking routines. Furthermore, the invention renders the treatment process

economical in fluid use and the amount of fluid used can be calibrated so as to minimise waste and also any environmental impact.

When the invention is used with automatic milking equipment, the discharge of the treatment fluid into the head portions of the liners and about the animal's teats may be initiated for example, in response to a signal  
5 initiating automatic cluster removal. The fluid is thereby applied to the teats and is coated over the latter as the teat cups are withdrawn and wipe down the teats. After take-off, the teat cups may be flushed or rinsed internally and dried, for example, with disinfectant, water and compressed air. Hitherto, this  
10 has typically been done by back flushing, or internally rinsing the teat cups, via flush valves connecting the short milk tubes to the discharge ends of the teat cups. Upon take off, the milking cluster is designed so as to enable the short milk tubes to fall away from the centre line of the cluster so that the teat cups are inverted and hang with their heads downwardly from the claw  
15 device in a rest position. Back flushing is performed with the teat cups in this position. Consequently, fluid can escape through the mouths of the teat cups.

According to a feature of the present invention, the nozzle means is arranged to discharge fluid into the head portion of the liner in a direction  
20 towards the discharge end or passageway of the liner. Hence, when the teat cup is allowed to fall into its inverted rest position, after take-off; with the head portion of the teat cup being directed downwardly, the interior of the liner may be flushed with fluid discharged upwardly into the barrel of the liner from the head portion. The flushing fluid can then drain downwardly from the interior  
25 of the liner and through its mouth.

Consequently, in addition to enabling treatment fluid to be discharged into the head of the teat cup liner so that the engaged teat is coated with fluid during take-off, the teat cup of the invention may serve the dual purpose of enabling sanitising, washing and drying of the teat cup liner after take-off by  
30 the injection of fluid upwardly into the liner when the teat cup falls into its rest position with its head downwardly.

During treatment and cleansing of the teats and teat cups, there is a risk that the fluids used may contaminate the harvested milk if they are not physically prevented from entering the short milk tube. Hence, the teat cup

according to the invention may be used with a shut-off valve which is connected to the discharge passageway of the liner and which can be actuated to prevent ingress of treatment and cleansing fluids into the milk tubes when, subsequent to milking, such fluids are discharged into the teat cup. Conveniently, the shut-off valve is mounted on the teat cup at the discharge end of the liner.

In the event that a teat cup becomes entangled upon take-off and is held in a head up attitude, a non-return bleed valve may be disposed adjacent and upstream of the shut off valve in order to allow liquid to drain from liner.

Preferably, the nozzle means is supplied with fluid via a non-return valve which may be disposed in the delivery tube supplying fluid to the nozzle means. This is desirable in order to avoid the vacuum occurring within the head of one teat cup of a milking cluster from affecting that in another one of the cups of the cluster when there is a difference in the degree of vacuum occurring within the teat cups as a result of the vacuum applied to the milk tubes for extracting milk from the teat cups. Differences in the degree of vacuum may occur, for example, because of the different sizes of the teats engaged by the teat cups of the cluster.

In order that the present invention may be more readily understood, reference will now be made to the accompanying drawings, in which:-

Figure 1 is an axial section through a teat cup and associated shut off valve, when in the milking position, with the valve being shown in an unactuated condition,

Figure 2 is a view similar to Figure 1 showing the valve in an actuated condition, and

Figure 3 is a view similar to Figure 2 showing the valve and teat cup in the inverted rest position which the teat cup is designed to adopt after take off.

The teat cup illustrated in Figures 1, 2 and 3 of the accompanying drawings is one of four similar teat cups of a milking cluster used for milking a cow and which is connected to automatic milking equipment. Each teat cup 1 comprises a hollow cylindrical shell 2 supporting a flexible liner 3 in spaced relation with the shell. As viewed in Figures 1 and 2, the liner has a

cylindrical barrel portion 8 sealed to the shell adjacent the bottom, discharge end 4 and adjacent the top or head end 5 of the cup. At the latter end, the liner has a head portion 6 which engages about the outside of the shell in order to seal the shell to the head end of the barrel, and which projects above the adjacent end of the shell. The head 6 of the liner is formed with a mouth 7 permitting access to the interior of the liner. . Between the top of the barrel 8 of the liner and the mouth 7, the head of the liner is formed with an internal annular cavity 9 which, when an animal's teat is inserted into the cup through the opening 7, forms a void or space 10 between the side of the teat and the head. At the discharge end 4 of the cup, the liner has a discharge passageway 4a communicating with a flexible, short milk tube 11 which connects the teat cup to a clawpiece (not shown) of the milking cluster and via which vacuum is applied to the inside of the liner for removing, from the cup, milk discharged by the teat during the milking cycle. By way of example, the shell 2 may be produced from stainless steel or plastics material and the liner 3 may be moulded from resilient plastics, synthetic rubber or silicone.

As will be appreciated by those skilled in the art, the cup 1 is fitted with suitable means (not shown) for connecting the space 12 between the shell 2 and the liner 3, via the clawpiece, to the associated milking point which has control means for alternately supplying vacuum pulses and venting the space 12 to atmosphere in order to cause the liner 3 to flex against the teat and stimulate a milking operation. The vacuum is supplied from a common source connected to the milking point by a manifold assembly of the milking equipment.

Extending into the inside of the head 6 of the liner, and into the cavity 9, is an injection nozzle 13 which is integral with a tube 14 for delivering fluid to the nozzle. This tube extends down the outside of the teat cup, to which it may be secured in any convenient manner, and has its distal end coupled, via the housing of a shut-off valve 20 (more fully described below), to a control valve system for selectively connecting the nozzle to supplies of disinfectant, conditioner, washing water and compressed air. The injection nozzle 13 is configured so as to direct fluid discharged from the nozzle inwardly and downwardly into the interior of the barrel 8 of the liner, as viewed in Figures 1 and 2.



The discharge end 4 of each teat cup liner is coupled to the associated short milk tube 11 by a shut off valve 20. The latter comprises a valve body 21 having a milk passageway 22 therethrough, opposite ends of which terminate in spigots 23,24 connecting the milk passageway to the discharge passageway 4a of the teat cup liner and the short milk tube, respectively. The valve body 21 has a cylindrical valve chamber 25 to one side of the milk passageway 22 which is connected to the latter via a circular opening 26. A valve member 27 moulded from flexible membrane material, such as, rubber, silicone or other elastomeric material, forms a seal between the chamber 25 and the opening 26. The membrane valve member 27 is moulded in a cylindrical cap-like shape having its cap portion 27a projecting into the chamber 25 and the cavity in the cap portion facing the milk passageway 22, when in the unactuated position shown in Figure 1. This valve member is fastened in position by an outwardly projecting radial flange 28 about the mouth of its cavity trapped between mating parts of the valve body. The valve chamber 25 is selectively connectable to a source of pneumatic pressure or vacuum for controlling the valve member 27 via a port 29 in the wall of the chamber which has its external end connected to a flexible pneumatic tube 30 coupling the port to the source of pneumatic pressure or vacuum. A pressure sensor (not shown) may monitor the pressure in the valve chamber 25 for detecting possible malfunction of the membrane valve member 27. A recess 31 is formed about the internal wall of the milk passageway 22 adjacent the valve chamber 25 for locating the valve member 27 when the latter is extended across the passageway in its actuated position.

The valve body 21 of the shut-off valve serves as a fixing point for the distal end of the delivery tube 14 for the injection nozzle 13. At its distal end, the delivery tube is coupled to a fluid passageway 32 formed through the valve body and having its inlet end 33 connected to a fluid supply tube 34 connected to the valve control system for selectively connecting the nozzle to supplies of treatment and cleansing fluid and compressed air. The inlet end 33 of the passageway 32 includes a pressure differential responsive, non-return valve 35, typically, a duck bill valve, which prevents a higher vacuum

occurring within the head of one teat cup, as a result of the vacuum applied for extracting milk, from affecting the vacuum in another one of the cups, when there is a difference in the degree of vacuum occurring within the heads of the teat cups.

5           Formed through the wall of the valve body 21 immediately upstream of the location recess 31 is a drain port 37 for enabling fluid trapped by the shut-off valve to drain from the valve. This port is controlled by a non-return flap valve 38 mounted on the valve body at the external end of the drain port 37.

10           Sanitising, rinsing and drying fluids, such as disinfecting and conditioning liquid, water and compressed air, as well as compressed air and vacuum for providing pneumatic control signals, are supplied to each milking point, from common sources, by a manifold system. At each milking point, a stall control unit incorporating solenoid operated valves selectively supplies the fluids from the manifold system to the teat cups 1, via a distributor  
15           mounted on the clawpiece and flexible tubing connecting the distributor to the teat cups. The clawpiece also serves to distribute pneumatic milking pulses derived from suitable sources to the spaces 12 in the teat cups for milking purposes. The apparatus for generating and supplying the pneumatic milking pulses is conventional and, since it forms no part of the present invention, it  
20           will not be described in detail.

          When a milking point is to be operated to milk a cow, for example, the stall control unit is actuated to apply vacuum to the short milk tubes 11 of the associated milking cluster and the teat cups 1 are fitted to the cow's teats T. When fitted, the teat cups are attached in the positions generally illustrated in  
25           Figures 1 and 2 with their heads 5 uppermost. The vacuum applied to the short milk tubes extracts, from the teat cups, milk discharged into the teat cup liners 3 from the engaged teats. It is also applied via the liner barrels, to the voids 10 between the teats and the heads 6 of the liners and serves to capture the cups on the teats. Vacuum and atmospheric pressure are then  
30           alternately applied in pulses to the space 12 between the liner and the shell of each teat cup in order to flex the liner against the teat and stimulate milking. These pneumatic pulses are alternately applied to pairs of the teat cups. Milk is extracted from each teat cup, via its discharge passageway 4a, the associated shut off valve 20 and the short milk tube 11, by the vacuum

applied through the claw device. This vacuum also retains the non-return flap valves 38 in the closed condition so that milk cannot bleed through the drain port 37.

During the milking cycle, the shut off valves 20 are in the open position, as illustrated in Figure 1. Also, during the milking cycle, clean filtered air, at atmospheric pressure, is admitted into the head of the liner, via the delivery tube 14 and the injection nozzle 13, under the control of a vacuum control valve disposed in the stall control unit and upstream of the non-return valves 35, in order to avoid the occurrence of excessive vacuum in the liner head and the risk of the liner creeping up the teat with resultant discomfort to the animal.

When the milking cycle is to be terminated, which is detected by a milk flow meter of the stall control unit as a reduction of milk flow below a predetermined level, the automatic cluster remover is signalled to take off the cluster from the cow's udder and, also, the programmable electronic circuit board of the stall control unit is signalled to commence the treatment and cleansing cycle. The valve system of the milking equipment maintains the supply line to the stall control unit primed with disinfectant so that, when the system is actuated to supply disinfectant to the tubes 34, disinfectant is supplied and distributed to the injection nozzles 13 in the liner heads of the teat cups with minimum delay and can be delivered at low pressure. The injection of this fluid is timed to occur upon or immediately prior to actuation of the cluster remover. Removal of the cluster from the teats may be aided by delivering pulses and/or a charge of low-pressure compressed air to the injection nozzles 13 and into the void 10 in each cup. In any event, as the cups are removed, disinfectant is discharged into each void 10 from the associated nozzle, spreads about the void and is wiped down the outside of each teat, thus ensuring that the whole teat is hygienically coated with disinfecting liquid. Because the fluid is injected at low pressure and because it is contained within the voids 10 as the cups are removed from the teats, this alleviates the problem of fluid vapour or mist in the surrounding environment and consequent health risks. Prior to full take off, compressed air is applied to the shut-off valves 20 via the pneumatic tubes 30, to actuate or extend the membrane valve members 27. As illustrated in Figure 2, upon

the application of air pressure, each valve member is turned inside out so as to project across the milk passageway 22 and is expanded or inflated so as to seal with the recess 31. This blocks the associated milk passageway and shuts-off fluid flow therethrough for the remainder of the treatment and  
5 cleansing cycle. Preferably, a pressure sensor monitors the shut-off valves to sense whether or not the valve members have operated correctly. If they have not, the associated milking cluster is shut down in conjunction with the actuation of an alarm.

Following actuation of the shut off valves 20 and take off, the teat cups  
10 1 naturally fall into a rest position in which they hang downwardly from the short milk tubes 11 and in an inverted position with their heads downwardly, as illustrated in Figure 3. When the teat cups fall into this downwardly hanging position, the control valve system connected to the supply tubes 34 is actuated so as, for example, sequentially to deliver two pulses of water, a  
15 pulse of disinfectant, such as iodine, two further pulses of water and then compressed air to the nozzles 13. Nozzles 13 spray these various fluids upwardly into the barrels 8 and towards the mouths 7 of the teat cup liners. The first two pulses of water flush the liners to wash away milk residue, soil and traces of the original disinfectant. The subsequent pulse of disinfectant  
20 is used to disinfect the liners and thereafter the pulses of water and compressed air wash away the disinfectant and dry the liners preparatory to the next milking cycle. Subsequent to the air drying pulses, vacuum is applied to the pneumatic lines 30 of the teat cups in order to retract the membrane valve members 27 from the milk passageways 22 into the valve  
25 chambers 23 and restore the valve members to the position shown in Figure 1.

Because vacuum is no longer applied to the milk passageways 22 to withdraw milk from the teat cups when the milking cycle is terminated, the pressure in the milk passageways above the extended membrane valve  
30 members 27 returns to atmospheric pressure and the flap valves 38 are free to open. This provides the facility for any fluid to drain away if a teat cup, for some reason, becomes entangled and is prevented from falling over upon take off and is held in a partially upright position.

Whilst a particular embodiment has been described, it will be understood that modifications can be made without departing from the scope of the invention as defined by the appended claims. For example, because the treatment and cleansing fluids are injected through a nozzle 13 in the head of the teat cup liner 3 and the treatment and cleansing etc of the interior of the teat cup is performed with the teat cup in a head down position so that the fluids drain through the mouth 7, it is not essential to position a shut-off valve, such as valve 20, at the discharge end 4 of the teat cup or in the associated short milk tube 11. This is because the short milk tube and the spigot connecting the short milk tube to the clawpiece are typically designed to cooperate and shut-off fluid flow from the short milk tube into the clawpiece when the teat cup hangs from the spigot in its rest position

The teat cup may be fitted with more than one nozzle 13 for injecting fluid into the cavity 9 in the head 6 of the liner 3 and these nozzles may be supplied via one or more fluid delivery tubes 14. Whilst, in the embodiment described, the fluid delivery tube 14 is a separate tube, it may alternatively be integrated with the head. It may, for example, extend between the shell 2 and the liner 3.

### CLAIMS

1. A teat cup (1) comprising a flexible liner (3) for engaging about a teat of an animal to be milked, said liner having a head portion (6), at one end, provided with a mouth (7) through which the teat is engageable with the liner,  
5 and a milk discharge passageway (4a) at the opposite end, and nozzle means (13) for discharging fluid into the liner (3), characterised in that said nozzle means (13) is arranged to discharge fluid into the head portion (6) of the liner.
2. A teat cup as claimed in claim 1, wherein the head portion (6) of the  
10 liner has an internal annular cavity (9) which, when the teat cup is engaged with an animal's teat, forms a void (10) between the side of the teat and the interior of the head portion, and wherein the nozzle means (13) is arranged to discharge fluid into the cavity (9) in the head portion.
3. A teat cup as claimed in claim 1 or 2, wherein the nozzle means (13) is  
15 arranged to discharge fluid in a direction towards the discharge passageway (4a) of the liner (3).
4. A teat cup as claimed in claim 1, 2 or 3, including a non-return valve (35) connected to the nozzle and via which fluid is supplied to the nozzle means.
- 20 5. A teat cup as claimed in any preceding claim, including a shut-off valve (20) connected to the discharge passageway (4a) of the teat cup for shutting off fluid flow from the teat cup into a milk tube downstream of the teat cup.
- 25 6. A teat cup as claimed in claim 6, wherein the shut-off valve (20) comprises a valve body (21) having a milk passageway (22) connected to the liner (3), a valve chamber (25) in the valve body connected to the milk passageway via an opening (26) in the wall of the passageway (22), a valve member (27) in the form of a flexible membrane disposed in sealing relation between the chamber (25) and the opening (26), and means (29) for  
30 connecting the chamber to a source of fluid pressure, whereby the application of fluid pressure to the chamber (25) extends and/or expands the membrane through the opening (26) into the milk passageway so that it seals the passageway (22) and shuts off fluid flow therethrough.

7. A teat cup as claimed in claim 6, wherein the membrane valve member (27) has a cap-like shape which, in the unactuated position of the valve member, projects into the valve chamber (25) with the cavity in the cap facing the passageway (22), whereby application of fluid pressure to the chamber (25) turns the cap valve member inside out so as to project across the passageway (22) in sealing relation with the wall or walls of the passageway.

8. A teat cup as claimed in claim 6 or 7, wherein the valve chamber (25) is connectable to a source of vacuum upon removal of the fluid pressure from the chamber, whereby to return the membrane (27) to its unactuated position within the valve chamber.

9. A teat cup as claimed in any preceding claim 5 to 8, including a drain port (37) on the upstream side of the shut-off valve for enabling trapped fluid to drain from the liner (3) in the event of the teat cup being held in a position in which the head portion (6) of the liner is uppermost, said drain port being controlled by a non-return valve (38).

10. A teat cup as claimed in claim 9, wherein the non-return valve is a flap valve (38).

11. A teat cup as claimed in any preceding claim, wherein the nozzle means comprises a single nozzle (12).

12. A teat cup as claimed in any preceding claim, including a delivery tube (14) connected to the nozzle means (13) for supplying fluid thereto, said delivery tube being attached to or integral with the teat cup.

13. A milking cluster comprising a plurality of teat cups (1) as claimed in any preceding claim, a plurality of short milk tubes (11) respectively connecting the discharge passageways (4a) of the teat cups to a clawpiece which collects milk discharged from the teat cups preparatory to onward delivery.

14. Milking equipment comprising a plurality of milking clusters as claimed in claim 13, wherein the clawpiece of each milking cluster is connected to a milk collection chamber of the equipment.

15. A method of milking comprising the steps of applying a teat cup (1) to a teat of an animal to be milked, said teat cup including a flexible liner (3) engaging about the teat, and having a head portion (6), at one end, provided

with a mouth (7) through which the teat is engaged with the liner, and a milk discharge passageway (4a) at the opposite end, activating the cup to perform a milking operation, and discharging treatment fluid into the liner (3) and withdrawing the teat cup from the teat when milking is terminated, characterised in that the treatment fluid is discharged into the head portion (6) of the teat cup (1) and on to the teat prior to and/or as the teat cup is withdrawn, such that withdrawal of the teat cup from the teat wipes the fluid down the teat.

16. A method as claimed in claim 15, including detecting when milking is to be terminated and, in response to said detecting step, withdrawing the teat cup (1) from the teat and discharging treatment fluid into the head portion (6) of the teat cup and onto the teat such that withdrawal of the teat cup from the teat substantially coats the teat with the treatment fluid

17. A method as claimed in claim 15 or 16, wherein the treatment fluid is discharged into a void (9) formed between the teat and the head portion (6) of the liner (3).

18. A method as claimed in claim 15, 16 or 17, wherein the discharge of fluid into the head portion (6) of the teat cup is controlled by a non-return valve.

19. A method as claimed in claim 15, 16, 17 or 18, including the steps of allowing the teat cup (1) to fall into an inverted position, after withdrawal from the teat, with the head portion (6) of the teat cup being directed downwardly, and flushing the interior of the liner (3) with treatment fluid, washing and/or drying fluid discharged upwardly into the liner from the head portion (6).

20. A method as claimed in any preceding claim 15 to 19, including the step of shutting off the discharge passageway (4a) of the liner (3) upon withdrawal of the teat cup so as to prohibit fluid from contaminating harvested milk.

21. A method as claimed in any preceding claim 15 to 20, including the step of applying a pulse of compressed air to the interior of the head portion (6) of the liner, subsequently to the discharge of fluid therein, so as to facilitate removal of the teat cup (1) from the teat.



## AMENDED CLAIMS

[received by the International Bureau on 7 April 2005 (07.04.05),  
original claims 1 to 21 replaced by new claims 1 to 25 (4 pages)]

## + STATEMENT

1. A teat cup (1) comprising a flexible liner (3) for engaging about a teat of an animal to be milked, said liner having a head portion (6), at one end, provided with a mouth (7) through which the teat is engageable with the liner, and a milk discharge passageway (4a) at the opposite end, and nozzle means (13) for discharging fluid into the head portion (6) of the liner, characterised in that the nozzle means (13) is arranged to discharge fluid in a direction towards the discharge passageway (4a) of the liner (3).
2. A teat cup as claimed in claim 1, wherein the head portion (6) of the liner has an internal annular cavity (9) which, when the teat cup is engaged with an animal's teat, forms a void (10) between the side of the teat and the interior of the head portion, and wherein the nozzle means (13) is arranged to discharge fluid into the cavity (9) in the head portion.
3. A teat cup as claimed in claim 1 or 2, including a non-return valve (35) connected to the nozzle means and via which fluid is supplied to the nozzle means.
4. A teat cup as claimed in claim 1, 2 or 3, including a shut-off valve (20) connected to the discharge passageway (4a) of the teat cup for shutting off fluid flow from the teat cup into a milk tube downstream of the teat cup.
5. A teat cup as claimed in claim 4, wherein the shut-off valve (20) comprises a valve body (21) having a milk passageway (22) connected to the liner (3), a valve chamber (25) in the valve body connected to the milk passageway via an opening (26) in the wall of the passageway (22), a valve member (27) in the form of a flexible membrane disposed in sealing relation between the chamber (25) and the opening (26), and means (29) for connecting the chamber to a source of fluid pressure, whereby the application of fluid pressure to the chamber (25) extends and/or expands the membrane through the opening (26) into the milk passageway so that it seals the passageway (22) and shuts off fluid flow therethrough.
6. A teat cup as claimed in claim 5, wherein the membrane valve member (27) has a cap-like shape which, in the unactuated position of the valve member, projects into the valve chamber (25) with the cavity in the cap facing the passageway (22), whereby application of fluid pressure to the chamber (25) turns the cap valve member inside out so as to project across

the passageway (22) in sealing relation with the wall or walls of the passageway.

7. A teat cup as claimed in claim 5 or 6, wherein the valve chamber (25) is connectable to a source of vacuum upon removal of the fluid pressure from the chamber, whereby to return the membrane (27) to its unactuated position within the valve chamber.

8. A teat cup as claimed in any preceding claim 4 to 7, including a drain port (37) on the upstream side of the shut-off valve for enabling trapped fluid to drain from the liner (3) in the event of the teat cup being held in a position in which the head portion (6) of the liner is uppermost, said drain port being controlled by a non-return valve (38).

9. A teat cup as claimed in claim 8, wherein the non-return valve is a flap valve (38).

10. A teat cup as claimed in any preceding claim, wherein the nozzle means comprises a single nozzle (12).

11. A teat cup as claimed in any preceding claim, including a delivery tube (14) connected to the nozzle means (13) for supplying fluid thereto, said delivery tube being attached to or integral with the teat cup.

12. A milking cluster comprising a plurality of teat cups (1) as claimed in any preceding claim, a plurality of short milk tubes (11) respectively connecting the discharge passageways (4a) of the teat cups to a clawpiece which collects milk discharged from the teat cups preparatory to onward delivery.

13. Milking equipment including a milking cluster comprising a plurality of teat cups (1), each of which comprises a flexible liner (3) for engaging about a teat of an animal to be milked, the liner having a head portion (6), at one end, provided with a mouth (7) through which the teat is engageable with the liner, and a milk discharge passageway at the opposite end, nozzle means (13) for discharging fluid into the head portion (6) of the liner, a plurality of short milk tubes respectively connecting the discharge passageways of the teat cups to a claw piece which collects milk discharged from the teat cups for onward delivery, and a cluster remover for effecting take-off of the cluster from the animal's udder, characterised by control means for initiating supply of treatment fluid to the nozzle means of the teat cups as the teat cups are

withdrawn from the teats so that withdrawal of the teat cups wipes the fluid down the teats.

14. Milking equipment as claimed in claim 13, wherein the nozzle means (13) of each teat cup is arranged to discharge fluid in a direction towards the discharge passageway (4a) of the associated liner (3).

15. Milking equipment as claimed in claim 13 or 14, including a non-return valve (35) connected to the nozzle means and via which fluid is supplied to the nozzle means.

16. Milking equipment as claimed in claim 13, 14 or 15, wherein the nozzle means of each teat cup comprises a single nozzle (12) directed into an internal annular cavity (9) within the head portion (6) of the associated liner.

17. Milking equipment as claimed in claim 13, 14, 15 or 16, including a shut-off valve (20) connected to the discharge passageway (4a) of each teat cup for shutting off fluid flow from the teat cup to the claw piece.

18. Milking equipment as claimed in claim 17, including a drain port (37) on the upstream side of each shut-off valve for enabling trapped fluid to drain from the associated liner (3) in the event of the teat cup being held in a position in which the head portion (6) of the liner is uppermost, said drain port being controlled by a non-return valve (38).

19. A method of milking comprising the steps of applying a teat cup (1) to a teat of an animal to be milked, said teat cup including a flexible liner (3) engaging about the teat, and having a head portion (6), at one end, provided with a mouth (7) through which the teat is engaged with the liner, and a milk discharge passageway (4a) at the opposite end, activating the cup to perform a milking operation, and, when the milking operation is terminated, discharging treatment fluid into the head portion (6) of the liner (3) and withdrawing the teat cup from the teat, characterised by discharging treatment fluid into the head portion (6) of the teat cup (1) and on to the teat as the teat cup is withdrawn, and utilising withdrawal of the teat cup to wipe the fluid down the teat.

20. A method as claimed in claim 19, including detecting when milking is to be terminated and, in response to said detecting step, withdrawing the teat cup (1) from the teat and discharging treatment fluid into the head portion (6)

of the teat cup and onto the teat such that withdrawal of the teat cup from the teat substantially coats the teat with the treatment fluid.

21. A method as claimed in claim 19 or 20, wherein the treatment fluid is discharged into a void (9) formed between the teat and the head portion (6) of the liner (3).

22. A method as claimed in claim 19, 20 or 21, wherein the discharge of fluid into the head portion (6) of the teat cup is controlled by a non-return valve.


23. A method as claimed in claim 19, 20, 21 or 22, including the steps of allowing the teat cup (1) to fall into an inverted position, after withdrawal from the teat, with the head portion (6) of the teat cup being directed downwardly, and flushing the interior of the liner (3) with treatment fluid, washing and/or drying fluid discharged upwardly into the liner from the head portion (6).


24. A method as claimed in any preceding claim 19 to 23, including the step of shutting off the discharge passageway (4a) of the liner (3) upon withdrawal of the teat cup so as to prohibit fluid from contaminating harvested milk.


25. A method as claimed in any preceding claim 19 to 24, including the step of applying a pulse of compressed air to the interior of the head portion (6) of the liner, subsequently to the discharge of fluid thereinto, so as to facilitate removal of the teat cup (1) from the teat.

Statement under Article 19(1) PCT

The present invention is concerned with the cleaning and/or disinfecting of animal's teats and teat cups, post-milking. Independent claims 1, 13 and 19 are directed to apparatus and a method devised for this purpose and have been drafted to distinguish the invention from cited document D1 (EP-A-0 277 396) relied on as an anticipation. D1 is primarily directed to the washing of animal's teats before milking. Insofar as D1 mentions washing, post-milking, it would be clear to the skilled reader that D1 intends this to be performed with the teat cup 23 of D1 remaining in engagement with a teat and the valve 34 in the position to discharge washing liquid to the waste line 35. When washing is complete, the valve 34 is switched to place the teat cup in contact with ambient pressure, via the bleed opening 19, so that the cup drops off the teat. There are no clear and unambiguous directions in D1, implicit or otherwise, to wash the teats of an animal, post-milking, by discharging treatment fluid into the head of the teat cup as the latter is withdrawn from a teat and utilising withdrawal of the teat cup to wipe the fluid down the teat, thereby coating the teat with the treatment fluid. This is the essence of the present invention and independent claims 1, 13 and 19 are directed to apparatus and a method suitable for performing such washing, post-milking.

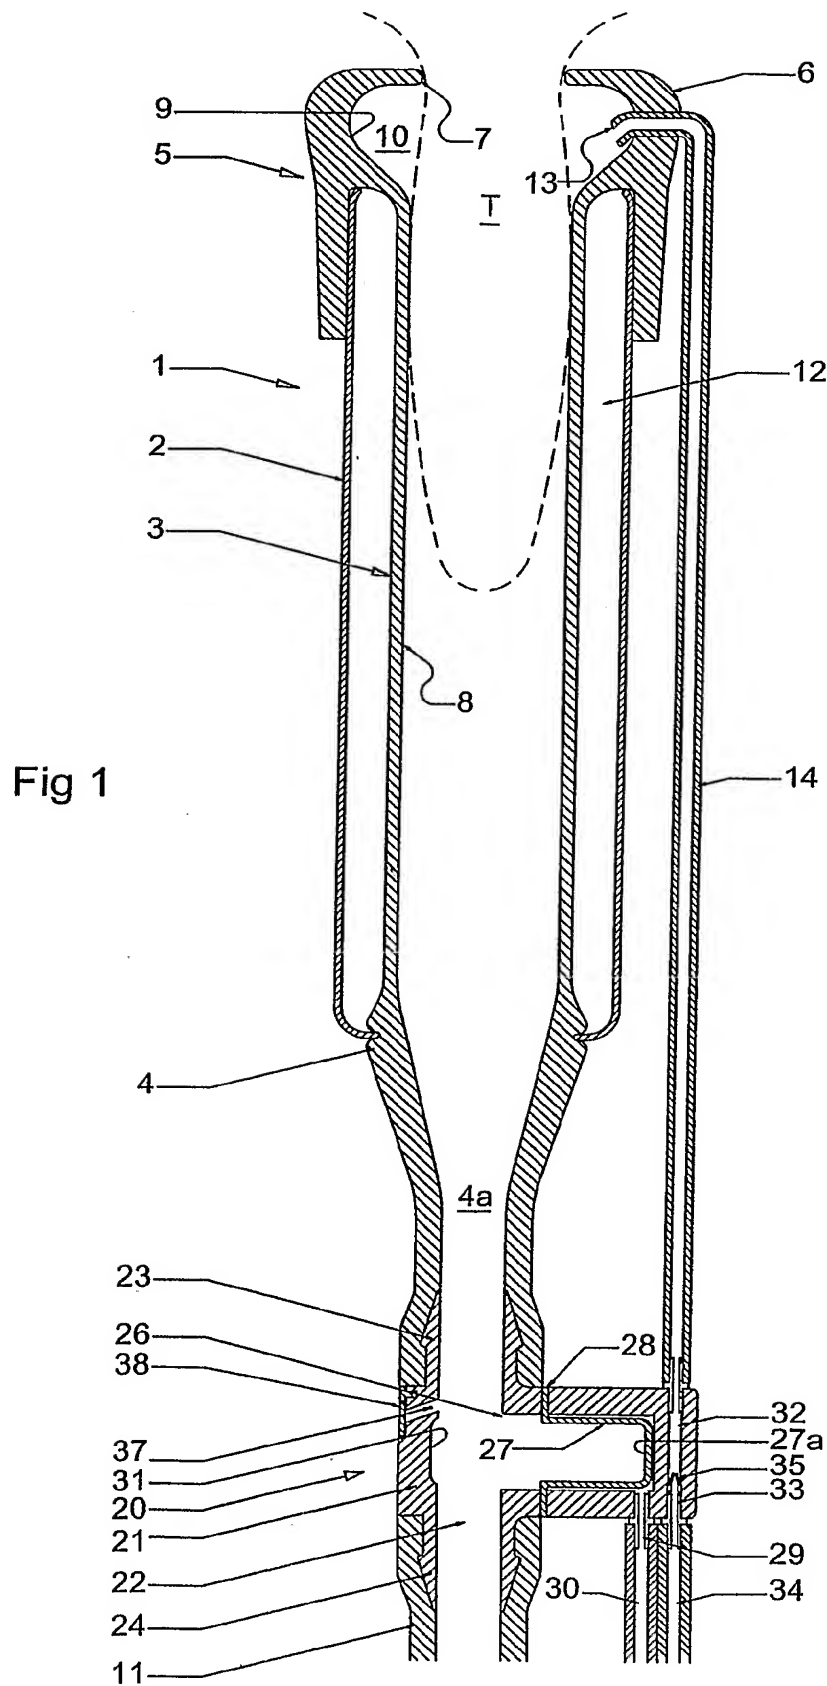

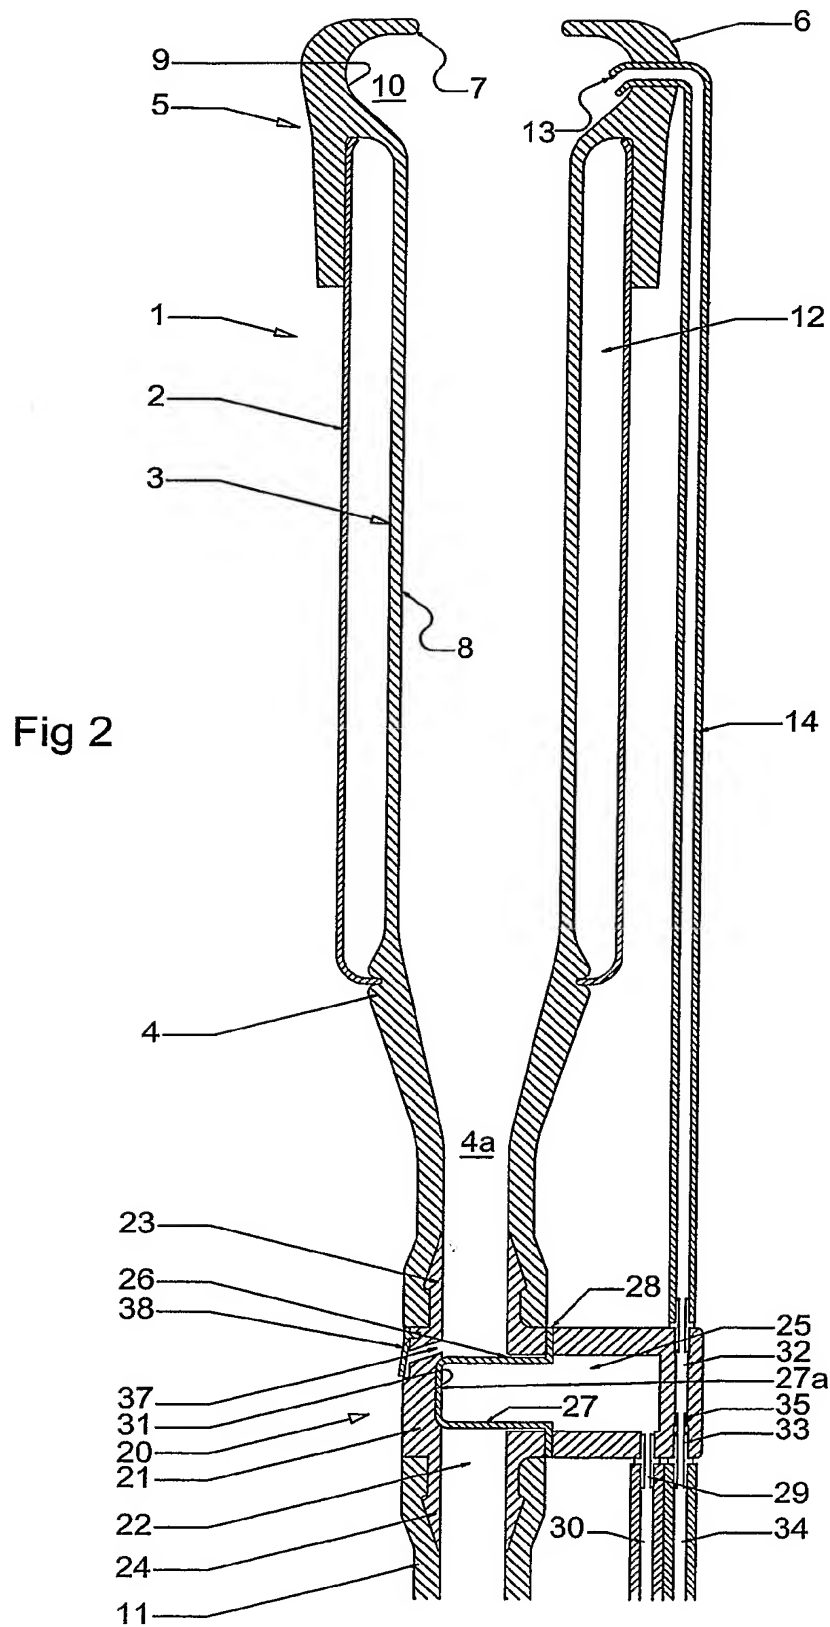

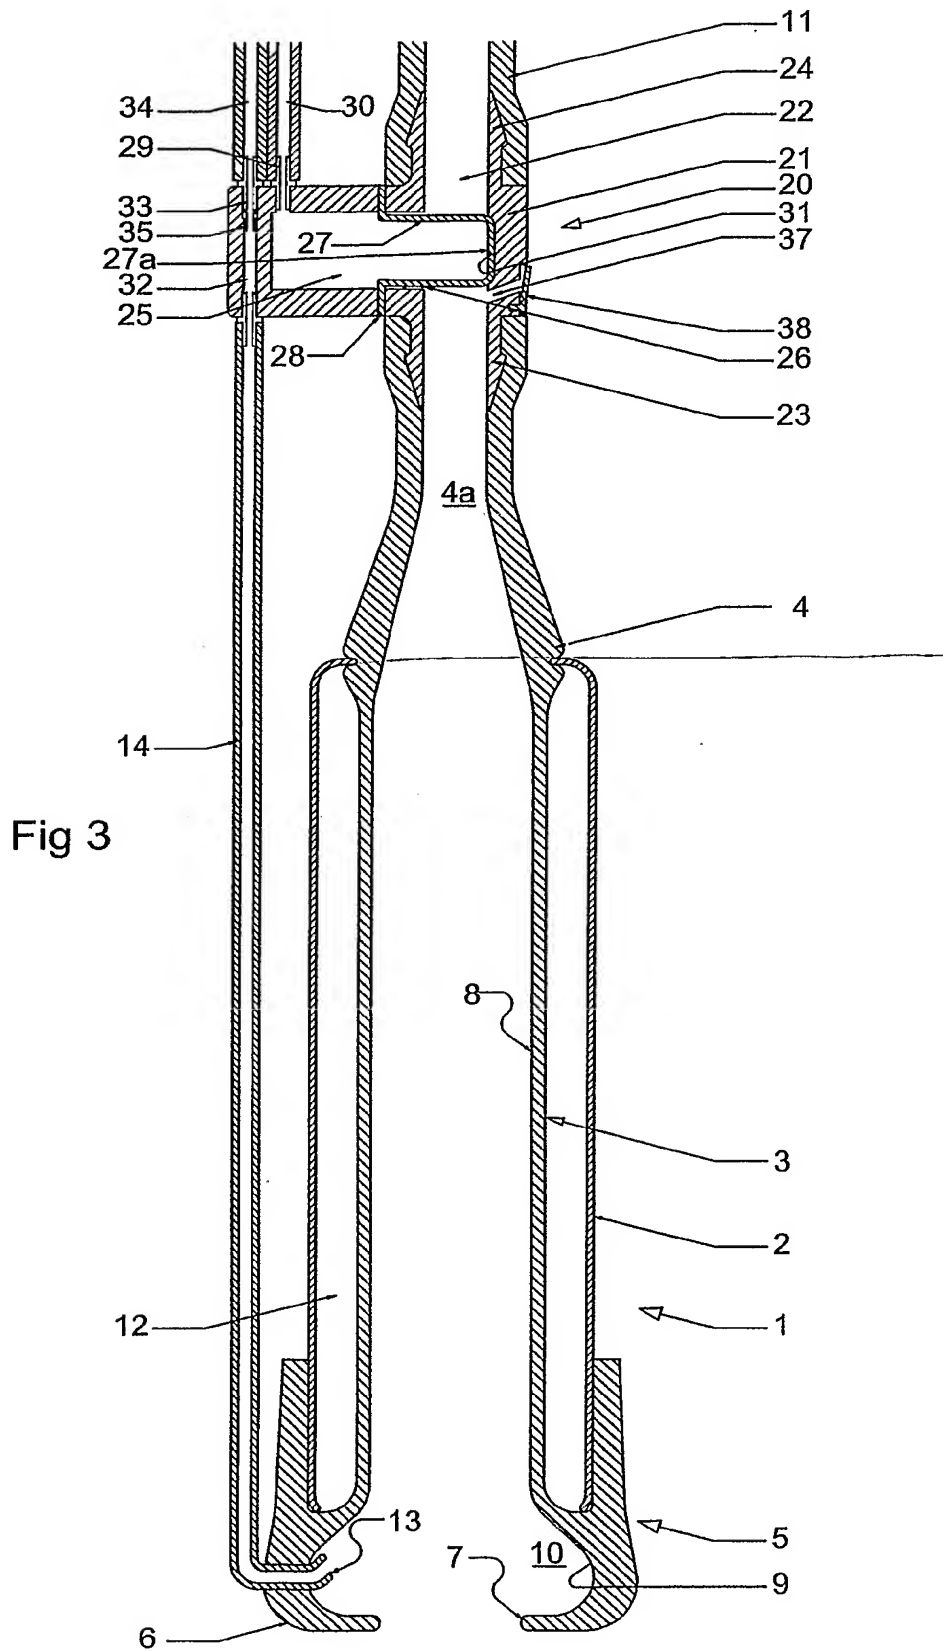



## INTERNATIONAL SEARCH REPORT

National Application No

T/GB2004/004343

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A01J7/04 A01J7/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 277 396 A (MULTINORM B.V; PROLION B.V) 10 August 1988 (1988-08-10)	1-5, 11-18, 20,21
Y	column 1 - column 2; figures 2,4 -----	19
X	GB 918 766 A (EDWARD DAVID DYKE) 20 February 1963 (1963-02-20)	1,3-8,12
Y	page 3; figure 3 -----	9,10
X	EP 1 219 167 A (MAASLAND N.V) 3 July 2002 (2002-07-03) column 3 - column 5; figures 2-4 ----- -/--	1-5,12

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

25 January 2005

Date of mailing of the international search report

07/02/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Moeremans, B

## INTERNATIONAL SEARCH REPORT

International Application No

P/GB2004/004343

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE WPI Section PQ; Week 199224 Derwent Publications Ltd., London, GB; Class P13, AN 1992-198051 XP002314833 -& SU 1 676 538 A1 (S LIVESTOCK RAISING MECHN ELECTRIF INST) 15 September 1991 (1991-09-15) abstract -----	1
Y	WO 01/17338 A (DELAVAL HOLDING AB; ERIKSSON, JAN) 15 March 2001 (2001-03-15)	9,10
A	figures 2,4 -----	15
Y	EP 0 543 463 A (BERTHOLD, JOHANNES THEODOOR DIETRICH; DIETRICH, BERTHOLD JOHANNES THEO) 26 May 1993 (1993-05-26) cited in the application claims 10,11; figures 1-3 -----	19
A	US 6 546 893 B1 (HAPPEL FRITZ ET AL) 15 April 2003 (2003-04-15) column 8; figures 12,13 -----	5-8

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

/GB2004/004343

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0277396	A	10-08-1988	NL 8700249 A	01-09-1988
			AT 81439 T	15-10-1992
			AU 602381 B2	11-10-1990
			AU 1020988 A	04-08-1988
			DE 3782238 D1	19-11-1992
			DE 3782238 T2	25-02-1993
			DK 50088 A	03-08-1988
			EP 0277396 A1	10-08-1988
			EP 0527509 A2	17-02-1993
			JP 2529875 B2	04-09-1996
			JP 63196216 A	15-08-1988
			JP 2608044 B2	07-05-1997
			JP 8037972 A	13-02-1996
			US 4924809 A	15-05-1990
GB 918766	A	20-02-1963	NONE	
EP 1219167	A	03-07-2002	EP 0801893 A2	22-10-1997
			EP 1219167 A2	03-07-2002
			EP 1208743 A2	29-05-2002
			DE 69715500 D1	24-10-2002
			DE 69715500 T2	24-04-2003
SU 1676538	A1	15-09-1991	NONE	
WO 0117338	A	15-03-2001	SE 518094 C2	27-08-2002
			AT 271311 T	15-08-2004
			AU 7466000 A	10-04-2001
			DE 60012338 D1	26-08-2004
			EP 1209965 A1	05-06-2002
			WO 0117338 A1	15-03-2001
			SE 9903199 A	10-03-2001
EP 0543463	A	26-05-1993	AT 199810 T	15-04-2001
			CA 2083357 A1	23-05-1993
			DE 69231748 D1	26-04-2001
			DE 69231748 T2	18-10-2001
			DK 543463 T3	16-07-2001
			EP 0543463 A1	26-05-1993
			ES 2157894 T3	01-09-2001
			IL 103813 A	10-01-1997
			US 5386799 A	07-02-1995
US 6546893	B1	15-04-2003	DE 19840732 A1	09-03-2000
			DE 19847912 A1	18-05-2000
			DE 19912615 A1	28-09-2000
			AT 259142 T	15-02-2004
			AU 1148800 A	27-03-2000
			WO 0013489 A2	16-03-2000
			DE 19981655 D2	27-09-2001
			DE 59908528 D1	18-03-2004
			EP 1119235 A2	01-08-2001